


CREPINE A BRIDE FOOT VALVE

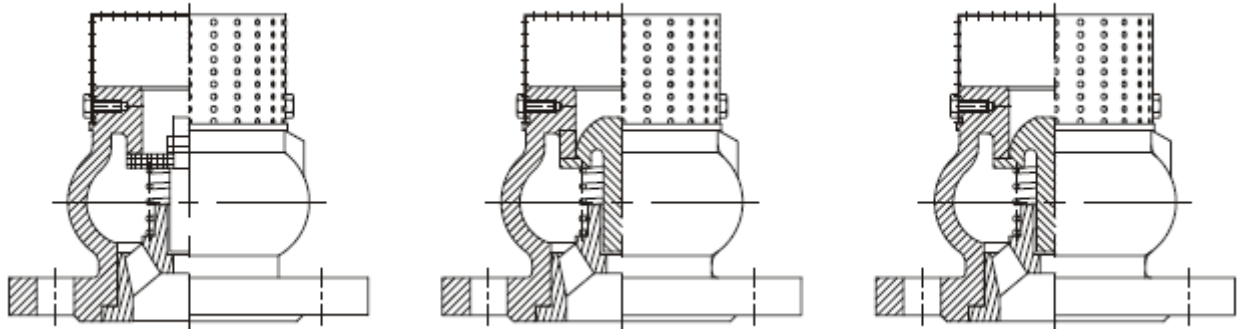

◆ Material

Body	Cast iron/Ductile iron
Disc	Cast iron/Ductile iron
Disc ring	NBR
Spring	Stainless steel/Steel with zinc
Screen	Stainless steel/Steel zinc plated

◆ Test

Working pressure	PN10/PN16	Class 125/150
Shell pressure	PN15/PN24	300PSI
Seat pressure	PN11/PN17.6	200PSI



◆ Dimensions

Size(DN)	50	65	80	100	125	150	200	250	300
H	166	201	221	265	300	360	580	568	653

Remark: Our design can be suitable for all standard (BS, DIN, ANSI, JIS standard etc.)

◆ Design

Face to face is according to ISO Standard

Flange drilled is according to DIN, BS, JIS, ANST etc



• LOT N°10 CITE EL HAMIZ 04 DAR EL BEIDA ALGER

• E-MAIL: ALFA.ACCESSOIRES@GMAIL.COM

• TEL: 021 87 75 30 • FAX: 021 87 75 32 • MOB: 0550 48 45 31